



K系列单向阀
K Series Check Valve



订购码
Ordering code




符号
Symbol



规格
Specifications

参数 Parameter	订购码 Ordering code	KA-L6	KA-L8	KA-L10	KA-L15	KA-L20	KA-L25	KA-L32	KA-L40	KA-L50
工作压力范围 MPa Working pressure range						0.05~0.8				
环境温度 °C Ambient temperature						-10~55				
介质温度 °C Fluid temperature						-5~50				
流通能力 S值mm ³ Negotiability		10	20	40	60	120	190	300	400	650
开关能力 (MPa) Open-close power						≤0.03				
泄漏量 cm ³ /min Leakage rate		50	50	120	120	250	250	250	500	500
响应时间 S Response time						0.03				
寿命 千次 / Thousands Life						≥1500				

尺寸
Dimensions

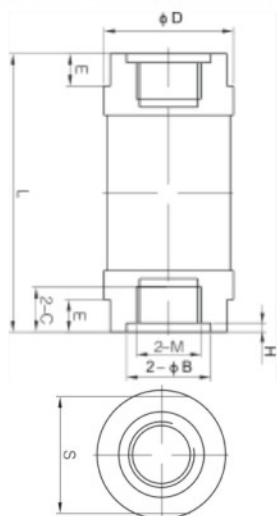

型号 Model	M	B	D	S	L	C	E	H
LA-L6	M10×1(G1/8")	13	28	24	64	10	6	1.4 ⁰ _{-0.1}
LA-L8	M12×1.25(G1/4")	16	28	24	64	12	6	1.4 ⁰ _{-0.1}
LA-L10	M16×1.5(G3/8")	20	40	36	86	14	10	1.8 ⁰ _{-0.1}
LA-L15	M20×1.5(G1/2")	26	40	36	86	14	10	1.8 ⁰ _{-0.1}
LA-L20	M27×2(G3/4")	32	55	46	112	21	12	1.8 ⁰ _{-0.1}
LA-L25	M33×2(G1")	40	55	46	112	23	12	2.7 ⁰ _{-0.12}
LA-L32	M42×1.5(G1 1/4")	48	68	75	161	25	22	2.7 ⁰ _{-0.12}
LA-L40	M48×2(G1 1/2")	54	68	75	161	26	25	2.7 ⁰ _{-0.12}
LA-L50	M60×2(G2")	70	100	90	195	26	28	4.5 ⁰ _{-0.18}

